

Signal Generation Platform

TG2000



Features and Benefits

- Multiformat Analog and Digital Test Signal Generation
- Reference Generator Performance Level
- Conforms to Analog and Digital, Video and Audio Industry Standards
- Modular Expandable Platform
- Designed for the Requirements of Today and the Future
- Fully Supports VM 700T Video Measurement Routines
- RAM-based Test Signal Generators with Nonvolatile Storage
- Test Signal Libraries for All Formats
- Variable Analog and Digital Video Parameters

Applications

- Research and Development
- Studio Reference Generator
- Manufacturing Test
- Equipment Design Maintenance
- Post-production and Broadcast Facilities
- Automated Manufacturing Test

The TG2000 is a multiformat, analog and digital, precision signal generation platform. Designed for the most demanding test applications, the TG2000 provides reference quality test signals, stressing functions in both the analog and digital domains, and the flexibility to address user-defined testing requirements. Comprehensive test signal libraries are supplied in all formats and are supplemented by a Windows-based test signal development program. The modular architecture, RAM-based test signal generators and programmable system clocks ensure the TG2000 will meet future needs as well as today's requirements.

AVG1 ANALOG VIDEO GENERATOR

The AVG1 is a high accuracy, multiformat analog test signal generator. The AVG1 supports NTSC, PAL, PAL-D, PAL-M, PAL-N, SECAM, RGB, YC and Y, B-Y, R-Y. Signal generation architecture is 12-Bit, 27 MHz component with digital modulation for composite signals. This ensures high accuracy, distortion free signals within a 6 MHz video bandwidth and signals suitable for many applications up to 8 MHz.

Tektronix[®]

DVG1 DIGITAL VIDEO GENERATOR

The DVG1 is a multiformat digital test signal generator. The DVG1 supports NTSC composite and 525 and 625 component digital sampled at 13.5 and 18 MHz. Parallel and serial outputs are provided.

Full field and active picture CRC generation is supported on the serial digital outputs and may be turned on and off from the front panel. Up to four channels of 20-Bit audio sampled at 48 kHz and locked to the video sampling clock may be embedded on the serial digital video output. Frequency and level for each channel may be set from the front panel.

AWVG1 ANALOG WIDEBAND VIDEO GENERATOR

The AWVG1 is a 30 MHz bandwidth test signal generator intended primarily for generation of wide band frequency and transient response test signals. **The AWVG1 can be used as a source of tri-level sync.** Signal generation is 12 bits with 72 MHz sampling that ensures very low distortion T pulse generation for bandwidths up to 6 MHz. A fully programmable zone plate generator is included. AWVG1 output is analog composite.

HDVG1 DIGITAL HDTV GENERATOR

The HDVG1 is a high-accuracy, multi-format, high-definition test signal module that provides three 1.485 Gb/s serial digital video test signal outputs in 1080i/60, 59.94, 1080p/25 and 24 Hz rates and 720p formats in 60 and 59.94 field rates. It is programmable with the included SDF2000 PC-based signal development software.

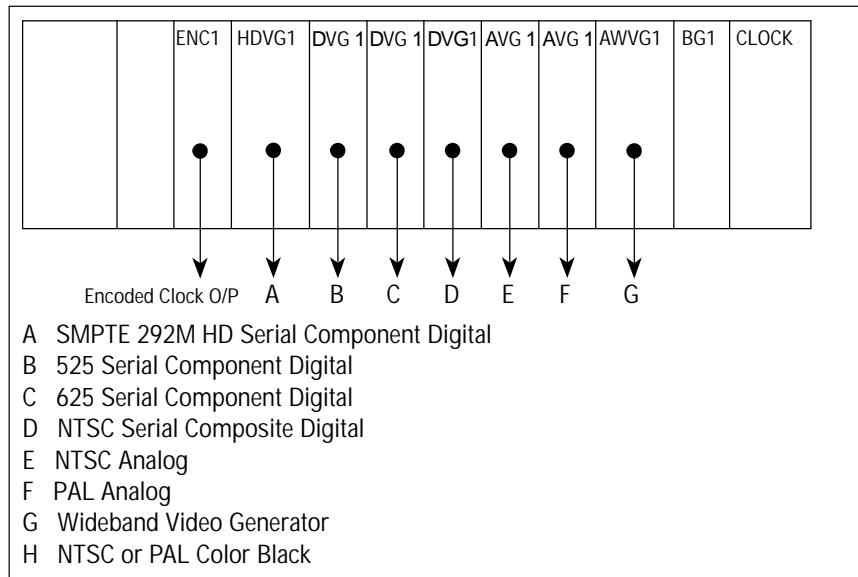


Figure 1. TG2000 configured to supply signals in several formats simultaneously.

SDP2000 SIGNAL DEVELOPMENT PROGRAM


The SDP2000 is a Windows-based software program that provides facilities to edit signals in the factory-supplied test signal libraries and to create new signals for special applications. Line and frame editing functions permit fast, easy changes to full field test signals and composition of multi-segment matrix signals for automated testing applications. Modified and new signals may be named and stored in the factory test signal libraries or in new user-created libraries.

INTERNAL AND EXTERNAL REFERENCE OPERATION

The TG2000 has a high stability internal reference making it suitable as the master house reference for most broadcast and production/post-production applications. A black burst output, selectable for NTSC or PAL, is provided with the TG2000 mainframe.

REMOTE CONTROL

The TG2000 provides a versatile and comprehensive remote control system. All front panel functions and controls are available via the RS-232 and optional GPIB ports. A subset of those functions is available via ground closure control.

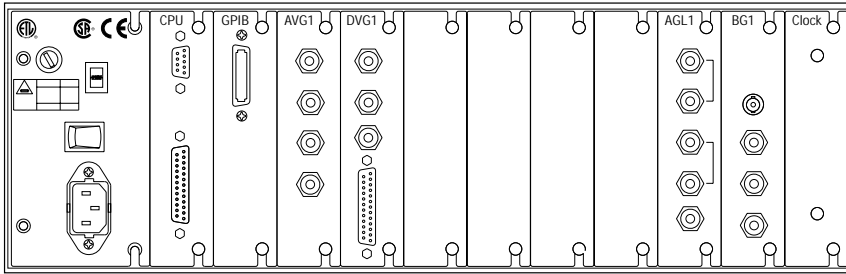

TG2000 Rear Panel.

TG2000 MAINFRAME

Black Burst Output –

Standards Conformance: EBU N14, SMPTE RP 154.
 Frequency:
 NTSC or PAL F_{sc} .
 Long-term stability: ≤ 1 ppm per year drift.

AVG1 ANALOG VIDEO GENERATOR

Standards Conformance – EBU N10, ITU-R BT.624, SMPTE 170M.
 Frequency Response – Within 0.5% to 6 MHz. Typically within 5% to 8 MHz.
 Differential Gain Error – $\leq 0.1\%$.
 Differential Phase Error – $\leq 0.1^\circ$.^{*1}
 S/N Ratio – ≥ 67 dB unweighted to 6 MHz, measured on a quiet line.
 SCH Phase Error – $\leq 2^\circ$.^{*1}

DVG1 DIGITAL VIDEO GENERATOR

Standards Conformance – EBU Tech. 3267; ITU-R BT.601, BT.656, BT.801; SMPTE 125M, 244M, 259M, 267M, 272M, RP 165, RP 178.
 Maximum Clock Frequency – 36 MHz.
 Resolution – 8 or 10 bits.
 Serial Output –
 Amplitude: 800 mV $\pm 10\%$ into 75 Ω .
 Overshoot: $\leq 10\%$.
 Rise and Fall times: 0.4 to 1.5 ns.
 Jitter: ≤ 0.2 UI p-p total for all jitter frequencies above 10 Hz.
 Embedded Audio –
 Number of Channels – 16 channels in 4 groups; 8 AES / EBU audio pairs.
 Audio Tones:
 Frequency: Silence to 24 kHz;
 28 discrete settings.
 Level: 0 to -60 dBFS in 2 dB steps.
 Pre-emphasis: None.

AWVG1 ANALOG WIDEBAND VIDEO GENERATOR

Frequency Response – Within 1% to 20 MHz, 2% to 30 MHz.
 Delay Errors –
 Group Delay: ≤ 3 ns to 20 MHz, ≤ 5 ns to 25 MHz.^{*1}
 Pulse Distortions –
 Pulse Ringing: 2T: $\leq 0.5\%$ peak; T: $\leq 1\%$ peak.
 Pulse to Bar Ratio – Unity within 0.5% for T and 2T.
 S/N Ratio – ≥ 60 dB unweighted to 30 MHz, measured on a quiet line.

HDTV1 TEST SIGNAL GENERATOR MODULE

Standards Compliance – SMPTE 272M, 292M.
 Electrical Characteristics –
 Connector (serial): (3) BNC.
 Bit Rate: 1.485 Gb/s, 1.485/1.001 Gb/s.
 Formats:
 1080i/60 Hz, 59.94, 50, 25 and 24 Hz.
 720p/60 Hz and 59.94 Hz.
 Amplitude: 800 mV $\pm 10\%$.
 Overshoot: $\leq 10\%$.
 Rise and Fall Times: ≤ 270 ps (20% to 80%) difference less than 100 ps.
 DC Offset (AC coupled): 0.0 V ± 0.5 V.
 Jitter: ≤ 135 ps (alignment jitter).
 Return Loss:
 ≤ 15 dB from 5 MHz to 742.5 MHz.
 ≤ 10 dB from 742.5 MHz to 1.485 GHz.

Audio Signal (Embedded) –

Channels Active: 1,2,3,4,5,6,7,8.
 Audio Sampling Frequency: 48 kHz.
 Sampling Alignment: Asynchronous, synchronous without frame numbers, synchronous with frame numbers.
 Sample Bits: 24, 20.
 For Each Channel:
 Audio Amplitude: 0 to -60 dBFS in 1 dB increments.
 Audio Frequency (Hz): 50, 100, 150, 200, 250, 300, 400, 500, 600, 750, 800, 1000, 1200, 1500, 1600, 2000, 2400, 3000, 3200, 4000, 4800, 6000, 8000, 9600, 12000, 16000, 24000.

AGL1 ANALOG GENLOCK MODULE

Inputs – Two 75 Ω loop through; one 75 Ω terminating.
 Loop Through Inputs –
 Input Range: ± 6 dB from nominal black burst.
 Return Loss: ≥ 40 dB to 5 MHz.
 Burst Lock Stability:
 Amplitude Changes: ≤ 1 ns change over a ± 3 dB input level.
 Jitter: ≤ 1 ns with ≥ 50 dB S/N ratio on a nominal amplitude reference input.
 Typically $\leq 1^\circ$.

CW Input –

Input Range: 1 to 2.25 V_{p-p} .
 Frequencies: NTSC and PAL F_{sc} : 1, 5 and 10 MHz.
 Return Loss: ≥ 30 dB to 10 MHz.
 Lock Stability:
 Amplitude Changes: ≤ 1 ns over the valid input range.
 Jitter: ≤ 1 ns with ≥ 50 dB S/N ratio for a 2 V reference input. Typically $\leq 0.5^\circ$.

Timing Adjustment (Black Burst Reference) –

Range: Anywhere within the color frame.
 Resolution: $\leq 0.5^\circ$.

Color Framing – Correct for up to $\pm 45^\circ$ SCH error on the reference input.

POWER SOURCE

Mains Range –
 Voltage: 87 to 132 or 174 to 250 V AC.
 Frequency: 50 to 60 Hz.
 Power Consumption – Typically 220 W for a fully loaded TG2000 mainframe.

ENVIRONMENTAL

Temperature –
 Operating: 0 to $+40^\circ\text{C}$.
 Nonoperating: -40 to $+65^\circ\text{C}$.

CERTIFICATIONS

EMC – Certified to the EMC Directive 89/336/EEC.
 Safety –
 Approved to: CSA1010.1, ANSI S82.01.
 Complies with: EN61010-1, IEC1010-1.

PHYSICAL CHARACTERISTICS

Dimensions	mm	in
Height	133	5.23
Width	483	19.0
Depth	584	23.0
Weight ^{*1}	kg	lb
Net	17.3	38.0
Shipping	23.7	52.0

^{*1} Denotes a typical performance characteristic.

Ordering Information

WHEN ORDERING, PLEASE OBSERVE THESE SIMPLE GUIDELINES:

- At least one signal generation module must accompany each TG2000 mainframe
- Only one AGL1 Genlock Module per TG2000 mainframe
- Only one GP1 GPIB Interface Module per each TG2000 mainframe
- Signal generator modules (AVG1, DVG1, AWVG1) may be combined in any mix desired up to the TG2000 mainframe limit of 8. The mix may contain up to 4 HDVG1 modules
- Add Opt. 88 to each item ordered. This will ensure your TG2000 package will come assembled and calibrated as a single unit
- Modules ordered to add to an existing TG2000 package do not require Opt. 88

TG2000

Generator Mainframe with BG1 Black Burst Generator.

AVG1

Analog Video Generator.

DVG1

Digital Video Generator.

Opt. S1 – SDI Test.

AWVG1

Analog Wideband Video Generator.

Tri-level Sync Generator.

AGL1

Analog Genlock Module.

GP1

GPIB interface.

HDVG1

High Definition Video Generator.

MEASUREMENT SERVICE OPTIONS

Opt. C3 – Three years of calibration services.

Opt. R3 – Repair warranty extended to cover three years.

For further information, contact Tektronix:



Worldwide Web: for the most up-to-date product information visit our web site at: www.tektronix.com/Measurement/video_audio/

ASEAN Countries (65) 356-3900; Australia & New Zealand 61 (2) 9888-0100; Austria, Central Eastern Europe, Greece, Turkey, Malta, & Cyprus +43 2236 8092 0; Belgium +32 (2) 715 89 70; Brazil and South America 55 (11) 3741-8360; Canada 1 (800) 661-5625; Denmark +45 (44) 850 700; Finland +358 (9) 4783 400; France & North Africa +33 1 69 86 81 81; Germany + 49 (221) 94 77 400; Hong Kong (852) 2585-6688; India (91) 80-2275577; Italy +39 (2) 25086 501; Japan (Sony/Tektronix Corporation) 81 (3) 3448-3111; Mexico, Central America, & Caribbean 52 (5) 666-6333; The Netherlands +31 23 56 95555; Norway +47 22 07 07 00; People's Republic of China 86 (10) 6235 1230; Republic of Korea 82 (2) 528-5299; South Africa (27 11)651-5222; Spain & Portugal +34 91 372 6000; Sweden +46 8 477 65 00; Switzerland +41 (41) 729 36 40; Taiwan 886 (2) 2722-9622; United Kingdom & Eire +44 (0)1344 392000; USA 1 (800) 426-2200.



From other areas, contact: Tektronix, Inc. Export Sales, P.O. Box 500, M/S 50-255, Beaverton, Oregon 97077-0001, USA 1 (503) 627-6877.

Copyright © 2000, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.